



RETEST FREQUENCIES :

Type of Installation	Rountine Check	Maximum Period between Inspections and testing as necessary
GENERAL INSTALLATION		
Domestic	-	10 Years*
Commercial	1 Year	5 Years*
Educational	4 Months	5 Years
Hospitals	1 Year	5 Years
Industrial	1 Year	3 Years
Residential	1 Year*	5 Years
Offices	1 Year	5 Years
Shops	1 Year	5 Years
Laboratories	1 Year	5 Years
BUILDINGS OPEN TO THE PUBLIC		
Cinemas	1 Year	1 to 3 Years
Church Installations	1 Year	5 Years
Leisure complexes	1 Year	3 Years
Public Entry	1 Year	3 Years
Restaurants / Hotels	1 Year	5 Years
Theatres	1 Year	3 Years
Public Houses	1 Year	5 Years
Village/Community	1 Year	5 Years
SPECIAL INSTALLATIONS		
Agricultural / Horticultural	1 Year	3 Years
Caravans	1 Year	3 Years
Caravan Parks	6 Months	1 Year
Highway Power Supplies	as convenient	6 Years
Marinas	4 Months	1 Year
Fish Farms	4 Months	1 Year
Swimming Pools	4 Months	1 Year
Emergency Lighting	Daily / Monthly	3 Years
Fire Alarms	Daily / Weekly / Monthly	1 Year
Laundrettes	1 Year	1 Year
Petrol Filling	1 Year	1 Year
Construction Sites	3 Months	3 Months
	* Or Change of Occupancy	

GET IN TOUCH

If you'd like to discuss your requirements with us, get in touch.

Simply Email or phone us and we will be happy to assist,

E-Mail: INFO@DATATRAK.LTD.UK

Tel: 01908 410790



DataTrak Ltd
 Ground Floor, 7 Furzton Lake
 Furzton, Milton Keynes
 Bucks, MK4 1GA
 tel 01908 410790
 fax 01908 410791
www.datatrak.ltd.uk
info@datatrak.ltd.uk



©Copyright 2012 DataTrak Ltd

Version 12.07b

Fixed Wire Testing How to count up circuits



01908 410790
www.datatrak.ltd.uk



Safety First!


ELECTRICITY IS DANGEROUS AND CAN KILL.

How to determine when the fixed wiring is next due to be inspected.



There is no reason to take the fixing screws and the lid off - that should only be done by a COMPETANT PERSON! Circuits can be counted up by opening the door(s) only.

It's simple - if the board has been done before it will have a inspection label with the date it was last inspected and the date of next inspection. If it has not got a Label, then it is a good bet that it has not been tested. You can refer to the table on the back of this leaflet for recommended test periods.

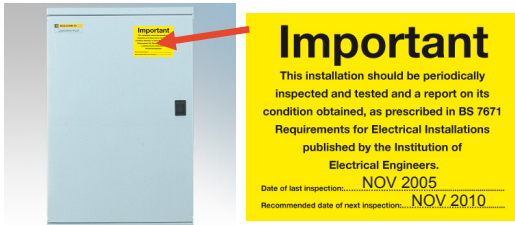

MCB IDENTIFICATION:



**SINGLE PHASE
CIRCUIT BREAKER
= 1 CIRCUIT**




**TWO POLE OR RCBO
CIRCUIT BREAKER
= 2 CIRCUIT**



**THREE PHASE
CIRCUIT BREAKER
= 3 CIRCUITS**

SINGLE PHASE CONSUMER UNIT CIRCUIT COUNTING

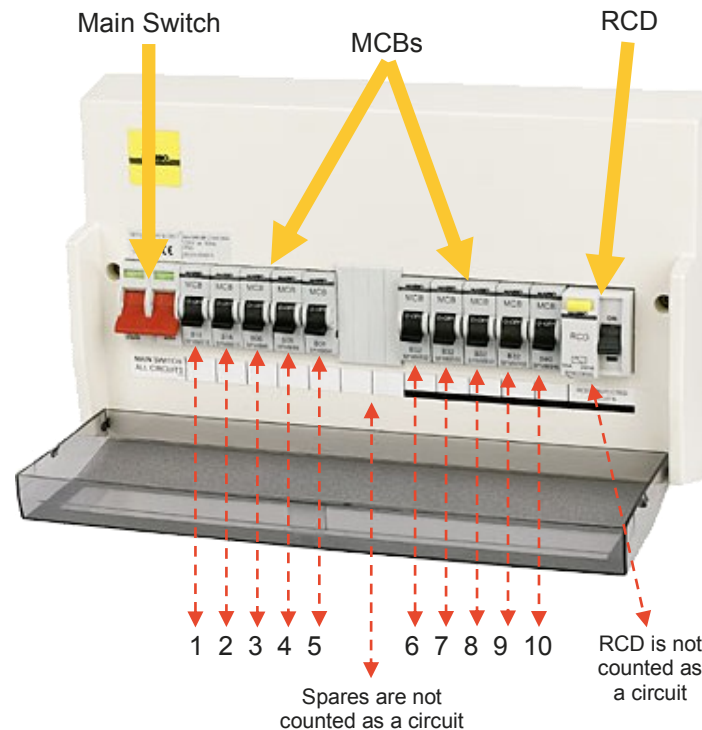


The Single Phase Consumer Unit above has (left to right)

- 1 Mains Switch = No Circuits
- 5 single phase circuits = 5 circuits
- 2 Spares = No Circuits
- 5 single phase circuits = 5 circuits
- 1 RCD = No Circuits

Total Circuits to be tested = 10

THREE PHASE DISTRIBUTION BOARD -TP & N 24 WAY BOARD-

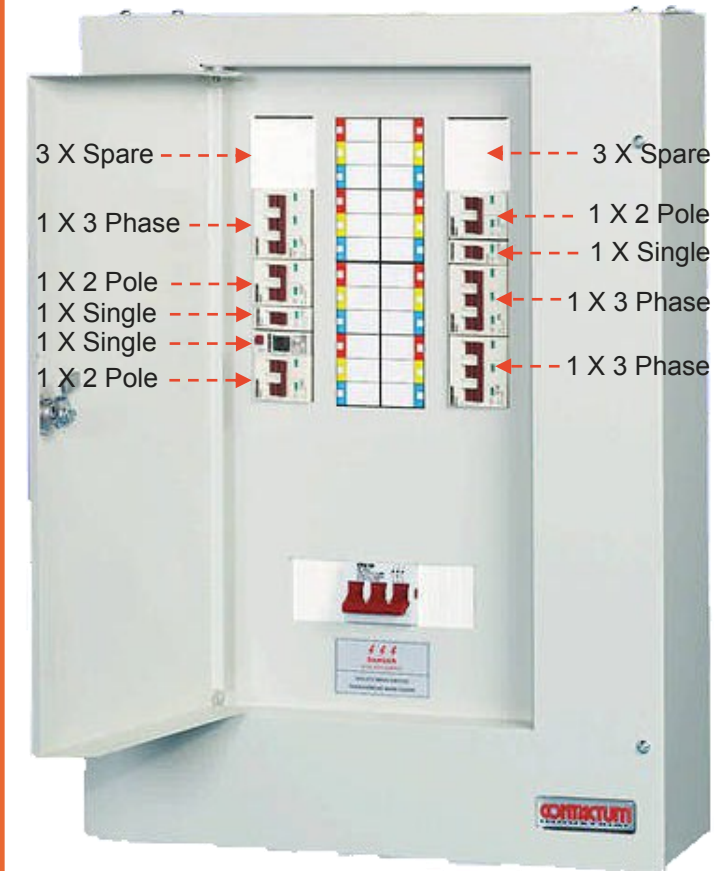

The Three Phase Board above has

- 6 Spares = No Circuits
- 3 single phase circuits = 3 circuits
- 3 two pole circuits = 6 circuits
- 3 three phase circuits = 9 circuits

Total Circuits to be tested = 18